

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
 2100 PENNSYLVANIA AVENUE, N.W.
 WASHINGTON, DC 20037-3213
 TELEPHONE (202) 293-7060
 FACSIMILE (202) 293-7860
 www.sughrue.com

October 20, 2000

BOX PCT

Assistant Commissioner for Patents
 Washington, D.C. 20231

PCT/JP00/00994 ✓
 -filed February 22, 2000

Re: Application of Fumio Takahashi ✓
 PNEUMATIC TIRE ✓
 Our Ref: Q61378



Dear Sir:

The following documents and fees are submitted herewith in connection with the above application for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with Chapter I of the Patent Cooperation Treaty:

- ☒ an executed Declaration and Power of Attorney.
- ☒ an English translation of the International Application.
- ☒ 18 sheet(s) of formal drawings.
- ☒ an English translation of Article 19 claim amendments.
- ☐ an English translation of Article 34 amendments (annexes to the IPER).
- ☒ an executed Assignment and PTO 1595 form.
- ☐ a Form PTO-1449 listing the ISR references, and a complete copy of each reference.
- ☒ a Preliminary Amendment

It is assumed that copies of the International Application, the International Search Report and references cited therein, the International Preliminary Examination Report, and any Articles 19 and 34 amendments as required by § 371(c) will be supplied directly by the International Bureau, but if further copies are needed, the undersigned can easily provide them upon request.

Priority is claimed from February 22, 1999 based on Japanese Application No. 11-43208.

The Government filing fee is calculated as follows:

Total claims	21	-	20	=	1	x	\$18.00	=	\$18.00
Independent claims	2	-	3	=		x	\$80.00	=	\$0.00
Base Fee									\$860.00

TOTAL FILING FEE	\$878.00
Recordation of Assignment	\$ 40.00
TOTAL FEE	\$918.00


09/ 673738

526 Rec'd PCT/PTO 20 OCT 2000

Assistant Commissioner
for Patents
Page 2

Checks for the statutory filing fee of \$878.00 and Assignment recordation fee of \$40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to said Account. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.492 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Respectfully submitted,


Robert J. Seas, Jr.

Registration No. 21,092

for

Neil B. Siegel, Reg. No. 25,200

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Date: October 20, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Fumio Takahashi

PCT/JP00/00994

-filed February 22, 2000

Filed: October 20, 2000

For: PNEUMATIC TIRE

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the Article 19 claims as follows:

1. (Amended) A pneumatic tire in which a plurality of blocks demarcated by circumferential grooves extending in a circumferential direction of the tire and grooves intersecting the circumferential grooves, are provided on a tread,

wherein at least a portion of a block edge is chamfered from the side of a block center to a groove wall surface of each of the blocks;

a heightwise cross sectional form of a chamfer portion perpendicular to the groove wall surface is formed by a combination of a plurality of chamfer forms;

an angle formed by a tangential line of the chamfer portion with respect to a horizontal extension line of the surface of the block center in a heightwise cross section perpendicular to the groove wall surface increases from the side of the block center to the side of the block end; and

[a heightwise cross sectional form of the chamfer portion is provided such that the side of the central portion of the block thereof is formed as a straight line portion and the side of the block end thereof is formed by at least one curved line portion having a fixed curvature] the

heightwise cross sectional form of the chamfer portion is provided such that a portion of the cross sectional form of the chamfer portion on the block central side is formed as a straight line portion and a portion of the cross sectional form of the chamfer portion on the block end side is formed by at least one curved line portion having a fixed curvature.


Claim 4,	line 1,	delete "any one of claims 1 to 4" and insert --claim 1--.
Claim 5,	line 1,	delete "any one of claims 1 to 4" and insert --claim 1--.
Claim 6,	line 1,	delete "any one of claims 1 to 5" and insert --claim 1--.
Claim 7,	line 1,	delete "any one of claims 1 to 6" and insert --claim 1--.
Claim 10,	line 1,	delete "claim 8 or".
Claim 11,	line 1,	delete "any one of claims 8 to 10" and insert --claim 9--.
Claim 12,	line 1,	delete "any one of claims 8 to 11" and insert --claim 8--.
Claim 13,	line 1,	delete "any one of claims 8 to 12" and insert --claim 8--.
Claim 14,	line 1,	delete "any one of claims 8 to 13" and insert --claim 8--.
Claim 15,	line 1,	delete "any one of claims 8 to 14" and insert --claim 8--.
Claim 16,	line 1,	delete "any one of claims 8 to 15" and insert --claim 8--.
Claim 17,	line 1,	delete "any one of claims 8 to 16" and insert --claim 8--.
Claim 18,	line 1,	delete "any one of claims 8 to 17" and insert --claim 8--.
Claim 19,	line 1,	delete "any one of claims 8 to 18" and insert --claim 8--.
Claim 20,	line 1,	delete "any one of claims 8 to 19" and insert --claim 8--.

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860


Robert J. Seas, Jr.
Registration No. 21,092
for
Neil B. Siegel, Reg. No. 25,200

Date: October 20, 2000

13 Rec'd PCT/PTO 06 NOV 2000

PATENT APPLICATION
Attorney Docket No. 061378

09/673738

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Fumio Takahashi

PCT/JP00/00994

-filed February 22, 2000

Filed: October 20, 2000

U.S. Appln. No.: 09/673,738

For: PNEUMATIC TIRE

SUPPLEMENTAL PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:


Please amend the Article 19 claims as follows:

Claim 21, line 1, delete "any one of claims 8 to 20" and insert --claim 8--.

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,

Paul F. Neils
Registration No. 33,102

for

Neil B. Siegel, Reg. No. 25,200

SUGHRUE, MION, ZINN,
MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860

Date: November 6, 2000

18/PR+5

09/ 673738

526 Rec'd PCT/PTO 20 OCT 2000

PNEUMATIC TIRE

FIELD OF THE INVENTION

The present invention relates to a pneumatic tire improved in handling stability.

BACKGROUND ART

In conventional pneumatic tires, normally, the height of each block is fixed (see Fig. 19).

The block 100 deforms (at the time of running) as shown in Fig. 20B, and a ground contact pressure of a tread surface 102 becomes ununiform (that is, the ground contact pressure becomes higher at ends of the block; see Fig. 20A). Therefore, it becomes difficult that braking force or driving force be transmitted from the entire tread surface 100 to a road surface 104.

A portion of the block 100 is worn down in an early stage due to the ununiformity of ground contact pressure, that is, uneven wear is apt to occur. Further, when shear stress caused by local concentration of ground contact pressure is input, only a region in the vicinity of a ground contact end of the block 100 at an input side of shear stress contacts the road surface locally in high pressure, and the tread surface 102 is turned up (see Fig. 21). As a result, the handling stability of tires is adversely affected.

In order to improve ground contact characteristics of tires, improvements of a tread pattern and the like have conventionally been

made. However, under the existing circumstances, there is a limit to the improvement because the aspect of water drainability or the relationship with other various characteristics must be considered simultaneously.

Further, there has also been made an improvement in which a region in the vicinity of the ground contact end of the block is chamfered for the purpose of making the ground contact pressure uniform. For example, it is general that an end 106 in which the ground contact pressure concentrates be tapered as shown in Fig. 22 or be chamfered substantially in an R-shaped manner as shown in Fig. 23.

In order that the ground contact pressure be made uniform by chamfering the block in an R-shaped manner, it is not necessary that the R-shaped curved surface be tangent to a groove surface 108 at the ground contact end of the block.

Accordingly, it is known that chamfering in which an R-shaped curved surface only tangent to the ground contact surface is provided as shown in Fig. 24, is very effective.

However, since a single curvature is used in the above-described chamfers, the effect of equalizing the ground contact pressure is not sufficiently obtained, although the ground contact pressure at the end of the block is reduced.

It is necessary for the purpose of further improvement in handling stability that the shape of the chamfer faithfully corresponds to the ground contact pressure distribution.

Further, as disclosed in Japanese Patent Application Laid-

Open (JP-A) No. 62-279105, a technique has been proposed in which a convex (chamfered) shape is formed at an upper portion of a block and along a circumferential or transverse direction of a tire. However, it is hard to obtain a tread surface of the block in which the above-described effect consists with other various characteristics only by using such technique. Furthermore, normally, determination of the shape of the tread surface is based on trial and error, and is also attended with difficulties.

The reason why is described below.

First, the distribution of ground contact pressure depends on the configuration of a tread pattern and is affected by deformation of the block to which input is applied (for example, deformation from the state of Fig. 19 to that of Fig. 20B, or deformation from the state of Fig. 19 to that of Fig. 21). Therefore, it is difficult to predict the distribution.

Further, there are various inputs applied to tires, and it is therefore very difficult to uniquely determine an aim for improvement suitable for all of the inputs.

Accordingly, a technique is demanded in which a method for changing a distribution of chamfer on the surface of the block is uniquely defined.

It is therefore an object of the present invention to provide a pneumatic tire in which ununiformity of ground contact pressure is prevented by defining a proper height of each block on the tread pattern, and handling stability and uneven wear resistance are

improved.

MEANS FOR SOLVING THE PROBLEM

In order to solve the above-described problems, the invention described in claim 1 is a pneumatic tire in which a plurality of blocks demarcated by circumferential grooves extending in a circumferential direction of the tire and grooves intersecting the circumferential grooves, are provided on a tread, wherein at least a portion of a block edge is chamfered from the side of a block center to a groove wall surface of each of the blocks; a heightwise cross sectional form of a chamfer portion perpendicular to the groove wall surface is formed by a combination of a plurality of chamfer forms; and an angle formed by a tangential line of the chamfer portion with respect to a horizontal extension line of the surface of the block center in a heightwise cross section perpendicular to the groove wall surface increases from the side of the block center to the side of the block end.

The invention described in claim 2 is characterized in that, in the invention described in claim 1, the cross sectional form of the chamfer portion is provided such that the block central side thereof (a portion of the cross sectional form of the chamfer portion on the block central side) is formed as a straight line portion and the block end side thereof (a portion of the cross sectional form of the chamfer portion on the block end side) is formed by at least one curved line portion having a fixed curvature.

The invention described in claim 3 is characterized in that, in

the invention described in claim 1 or claim 2, the cross sectional form of the chamfer portion is comprised of two curved line portions having different curvatures.

The invention described in claim 4 is characterized in that, in the invention described in any one of claims 1 to 3, when in the heightwise cross section perpendicular to the groove wall surface, a length of the chamfer portion measured along a horizontal extension line of the surface of the block central portion is represented by L1 and a likewise measured length of the block is represented by L0, the ratio $L1/L0$ is in the range from 0.02 to 0.3.

The invention described in claim 5 is characterized in that, in the invention described in any one of claims 1 to 4, a distance, measured along a radial direction of the tire, between the horizontal extension line of the surface of the block central portion and an intersection point of the chamfer portion and the groove wall surface is in the range from 0.10 mm to 2.50 mm.

The invention described in claim 6 is characterized in that, in the invention described in any one of claims 1 to 5, when a heightwise distance between a groove bottom of the block and the intersection point of the chamfer portion and the groove wall surface is represented by H1 and the maximum height of the block is represented by H0, the ratio $H1/H0$ is greater than or equal to 0.75 and less than 1.0.

The invention described in claim 7 is characterized in that, in the invention described in any one of claims 1 to 6, the cross sectional form of the chamfer portion changes at a peripheral edge of the block

for each portion of the block.

The invention described in claim 8 is characterized in that, in the invention described in any one of claims 1 to 7, a peripheral protuberant portion is formed on a tread surface of the block in the vicinity of the end edge thereof in such a manner that the height of the block gradually decreases toward the block end edge and also toward the central portion of the block.

The invention described in claim 9 is characterized in that, in the invention described in claim 8, the peripheral protuberant portion is formed in at least both end edge portions of the block in the cross section of the block taken along the heightwise direction.

The invention described in claim 10 is characterized in that, in the invention described in claim 8 or claim 9, the peripheral protuberant portion is disposed in vicinities of the end edges at both sides of the block in the circumferential direction of the tire.

The invention described in claim 11 is characterized in that, in the invention described in any one of claims 8 to 10, the peripheral protuberant portion is disposed in vicinities of the end edges at both side of the block in the transverse direction of the tire.

The invention described in claim 12 is characterized in that, in the invention described in any one of claims 8 to 11, a dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion is in the range from 0.1 to 2.5 mm.

The invention described in claim 13 is characterized in that, in the invention described in any one of claims 8 to 12, a dimension HH2 measured along the radial direction of the tire, between a maximum depth portion in a central region of the block and the height position of the top of the peripheral protuberant portion is in the range from 0.1 to 2.50 mm.

The invention described in claim 14 is characterized in that, in the invention described in any one of claims 8 to 13, the ratio between the dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion, and the dimension HH2 measured along the radial direction of the tire, between a maximum depth portion in a central region of the block and the height position of the top of the peripheral protuberant portion, that is, $HH2/HH1$, is 1.5 or less.

The invention described in claim 15 is characterized in that, in the invention described in any one of claims 8 to 14, a dimension LL1 measured in a direction of the tread surface, between the intersection point of the groove wall surface of the block and the peripheral protuberant portion, and the top of the peripheral protuberant portion is 10.0 mm or less.

The invention described in claim 16 is characterized in that, in the invention described in any one of claims 8 to 15, with respect to the dimension LL1 measured in a direction along the tread surface

between the intersection point of the groove wall surface of the block and the peripheral protuberant portion and the top of the peripheral protuberant portion, and a dimension LL2 measured in the direction along the tread from the top of the peripheral protuberant portion to the maximum depth portion in the central region of the block, LL1/LL2 is 2.0 or less.

The invention described in claim 17 is characterized in that, in the invention described in any one of claims 8 to 16, with respect to the dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion, and the dimension LL1 measured in a direction along the tread surface, between the intersection point of the groove wall surface of the block and the peripheral protuberant portion, and the top of the peripheral protuberant portion, HH1/LL1 is 1.0 or less.

The invention described in claim 18 is characterized in that, in the invention described in any one of claims 8 to 17, with respect to the dimension HH2 measured along the radial direction of the tire between a maximum depth portion in a central region of the block and the height position of the top of the peripheral protuberant portion, and the dimension LL2 measured in the direction along the tread from the top of the peripheral protuberant portion to the maximum depth portion in the central region of the block, HH2/LL2 is 1.0 or less.

The invention described in claim 19 is characterized in that, in

the invention described in any one of claims 8 to 18, the ratio between the maximum height H_0 and the minimum height T_1 of the block, that is, T_1/H_0 is set in the range of $0.75 \leq T_1/H_0 < 1.0$.

The invention described in claim 20 is characterized in that, in the invention described in any one of claims 8 to 19, the peripheral protuberant portion is formed along an entire periphery of the end edge portion of the block.

EFFECTS OF THE INVENTION

Next, an effect of the pneumatic tire described in claim 1 will be described.

As illustrated in Fig. 20A, the ground contact pressure distribution of each of blocks formed on a tread gradually increases from a central portion C to ends of the block and becomes high locally at the ends.

It was considered from the above-described fact that an angle of inclination (including a curvature) of the chamfer portion be preferably made larger toward the end of the block as shown in Fig. 1.

The "angle of inclination" mentioned herein is an angle formed by an extension line of the surface at the central portion of the block tread surface in a cross sectional form of the block with respect to a tangential line of the chamfer portion.

Due to the above-described structure or due to a combination of a plurality of chamfer forms, correction of the ground contact pressure corresponding to ununiformity of the ground contact

pressure, which conventionally could not be corrected, becomes possible, and the ground contact pressure on the block tread surface can be equalized further.

As a result, handling stability of the tire improves.

Next, an effect of the invention described in claim 2 will be described.

In the above-described structure, a portion of the block in which the ground contact pressure does not change so much (that is, the side of the center of the block) is formed as a straight line (a fixed angle of inclination) portion and a portion of the block in which the ground contact pressure changes greatly (that is, the side of the block end) is formed by at least one curved line portion having a fixed curvature. Therefore, although it is a simple structure, the ground contact pressure can be equalized.

An effect of the invention described in claim 3 will be described.

Due to the above-described structure, the side of the center of the block in which the ground contact pressure does not change so much, and the side of the block end in which the ground contact pressure changes greatly, are formed by two curved line portions having different curvatures. Therefore, in spite of a simple structure, equalization of the ground contact pressure can be accomplished.

Further, when the side of the center of the block is formed as a straight line portion, only the side of the block end can be formed by two curved line portions having different curvatures. As a result, the ground contact pressure can be equalized still more.

An effect of the invention described in claim 4 will be described.

When $L1/L0$ is less than 0.02, an effect of equalizing the ground contact pressure of the block tread surface by the chamfer portion is small.

On the other hand, when $L1/L0$ is more than 0.3, the area of the central portion of the block decreases and there is a possibility that the handling stability may be deteriorated.

Accordingly, it is preferable that $L1/L0$ is in the range from 0.02 to 0.3.

An effect of the invention described in claim 5 will be described.

When the distance measured, along a radial direction of the tire, between an extension line of the surface of the block central portion and an intersection point of the chamfer portion and the groove wall surface is less than 0.10 mm, an effect of equalizing the ground contact pressure by the chamfer portion is small. On the other hand, when the distance is greater than 2.50 mm, the ground contacting area decreases and the handling stability of the tire is deteriorated.

An effect of the invention described in claim 6 will be described.

When $H1/H0$ is less than 0.75, the ground contacting area decreases and the handling stability of the tire is deteriorated. On the other hand, when the $H1/H0$ is 1.0 or more, an effect of equalizing the ground contact pressure by the chamfer portion is small.

An effect of the invention described in claim 7 will be

described.

The distribution of ground contact pressure between ends of the block varies depending on the measured direction (i.e., in the circumferential direction of the tire or in the transverse direction of the tire) or depending on the distance from a corner of the block.

Accordingly, due to the shape of the chamfer portion provided to correspond to the distribution of ground contact pressure being changed at a peripheral edge of the block, the ground contact pressure on the tread surface is equalized further.

An effect of the invention described in claim 8 will be described.

When the conventional block whose height is fixed contacts the road surface, the ground contact pressure particularly becomes especially large at a ground contacting end of the block and becomes large at the central portion of the block, and relatively becomes small in a region of the block between the ground contacting end and the central portion (see Fig. 20A). As illustrated in Fig. 16, when the peripheral protuberant portion 20 is formed on the tread surface of the block 18 in the vicinity of the end edge of the block in such a manner that the height thereof gradually decreases toward the end edge of the block and toward the central portion of the block, the height of each of regions of the block at both sides of the peripheral protuberant portion 20, that is, the height of the block at the sides of the end edge and the central portion is lower than the peripheral protuberant portion 20. Accordingly, the ground contact pressure at the sides of the end edge

and at the central portion of the block can be reduced and ununiformity of the ground contact pressure can be prevented.

The circumferential grooves may be disposed parallel to the circumferential direction of the tire or may be inclined to the circumferential direction of the tire to a certain extent.

The lateral (direction) grooves may merely intersect the circumferential (direction) grooves at the least. The lateral grooves may be disposed parallel to the transverse direction of the tire or may be inclined with respect to the transverse direction of the tire to a certain extent.

Further, in order to prevent uneven wear which is locally caused by an ununiform distribution of the ground contact pressure, the peripheral protuberant portion is preferably raised by a gradual slope, that is, a contour line of the tread surface of the block in the cross section along the heightwise direction is preferably formed by a smooth curved line.

An effect of the invention described in claim 9 will be described.

In the pneumatic tire described in claim 9, the peripheral protuberant portion is formed in at least both end edge portions of the block in the cross section along the heightwise direction of the block. Therefore, ununiformity of the ground contact pressure in at least the vicinities of both end edges of the block can be suppressed and the ground contact pressure can be made uniform along the cross sectional direction of the block.

An effect of the invention described in claim 10 will be described.

In the pneumatic tire described in claim 10, the peripheral protuberant portion is disposed at both sides of the block in the circumferential direction of the tire, and therefore, ununiformity of the ground contact pressure of the block in the circumferential direction of the tire can be suppressed. As a result, an extremely local deformation of the block caused by braking/driving force is prevented and the handling stability improves. Further, uneven wear in the vicinity of the block end in the circumferential direction of the tire, which is caused by ununiformity of the ground contact pressure of the block in the circumferential direction of the tire, can be prevented.

Furthermore, since the peripheral protuberant portion is formed at both sides of the block in the circumferential direction of the tire, directionality of the tire is not caused.

An effect of the invention described in claim 11 will be described.

When the peripheral protuberant portion is formed on the tread surface of the block in the vicinities of the end edges of the block in the transverse direction of the tire in such a manner that the height thereof gradually decreases from the top of the peripheral protuberant portion, which is disposed toward the center of the block from the end edge of the block in the transverse direction of the tire, to the central portion of the block in the transverse direction of the tire and to the end edges of the block in the transverse direction of the tire, the

ground contact pressure at ground contacting ends of the block in the transverse direction of the tire can be reduced and ununiformity of the ground contact pressure of the block in the transverse direction of the tire can be suppressed.

Accordingly, occurrence of uneven wear in the vicinities of the block ends in the transverse direction of the tire, which is caused by ununiformity of the ground contact pressure of the block in the transverse direction of the tire can be prevented.

An effect of the invention described in claim 12 will be described.

So long as the dimension HH1 is a positive value, an aim to alleviate concentration of the ground contact pressure is achieved. Therefore, the range of the dimension in which a desired effect is produced is wide.

However, a deformation of the block is limited under application of input to the tire. For this reason, when the dimension HH1 is too large, (one or) some part of the tread surface of the block does not contact the road surface. That is, the ground contacting area of the block decreases.

Accordingly, the upper limit of the dimension HH1 is set to be 2.5 mm so as to prevent an extreme decreasing the ground contacting area.

On the other hand, when the dimension HH1 is less than 0.1 mm, an effect of reducing the ground contact pressure of the end edge of the block is small and an effect of preventing ununiformity of the

ground contact pressure may not be sufficiently obtained.

Accordingly, the dimension HH1 is in the range from 0.1 to 2.5 mm.

The dimension HH1 is more preferably in the range from 0.3 to 1.0 mm.

An effect of the invention described in claim 13 will be described.

When the dimension HH2 measured, along the radial direction of the tire, between a maximum depth portion at the central region of the block (that is, the lower end of the bottom of the peripheral protuberant portion) and the height position of the top of the peripheral protuberant portion is 0.1 mm or more, the ground contact pressure at the central portion of the block can reliably be reduced.

An optimum value of the dimension HH2 is determined for each portion of the block depending on the compressive rigidity and shape of the block. The effect of the invention is produced when the dimension HH2 is greater than 0. That is, so long as the dimension HH2 is a positive value, an aim at improvement is achieved.

However, if this value is too large, the ground contacting area decreases (the central portion of the block does not contact the road surface), and deterioration in tire performances is caused. Therefore, the range of the dimension in which an excellent effect is produced and the performances are maintained is 0.1 to 2.5 mm.

An effect of the invention described in claim 14 will be described.

When HH2/HH1 is 1.5 or less, in the ground contact pressure distribution at the time of the block contacting the road surface, the ground contact pressure of the maximum depth portion (in the vicinity of the central portion of the block) and the ground contact pressure of the top of the peripheral protuberant portion approximate to each other. Further, when HH2/HH1 is 1.0 or less, the ground contact pressure in the vicinity of the maximum depth portion and the ground contact pressure of the top of the peripheral protuberant portion further approximate to each other. Therefore, this range is preferable.

On the other hand, when HH2/HH1 is more than 1.5, the ground contact pressure in the vicinity of the maximum depth portion and the ground contact pressure of the top of the peripheral protuberant portion are different from each other, and equalization of the ground contact pressure cannot be achieved.

An effect of the invention described in claim 15 will be described.

When the dimension LL1 is 10.0 mm or less, the ground contact pressure can be equalized still more. When the dimension LL1 is set outside the above-described range, there is a possibility that the ground contact pressure may be made ununiform.

The dimension LL1 is preferably in the range from 1.5 to 6.0 mm, more preferably in the range from 1.5 to 4.0 mm.

When the dimension HH1 is fixed and the dimension LL1 is variable, the shorter the dimension LL1 becomes, the steeper the slope in the region is. The longer the dimension LL1 becomes, the shallower

the slope in the region is.

An effect of the invention described in claim 16 will be described.

When it is considered that the block size is fixed, the dimension LL2 is determined depending on the dimension LL1. In the general rectangular block, it is ideal in terms of a compressive rigidity distribution that the central portion of the block in section is smoothly recessed. In order to equalize the distribution of ground contact pressure, desirably, the dimension LL2 is made larger than the dimension LL1.

In a block pattern having a special configuration, partial inversion of ground contact pressure may be caused depending on the cross sectional form. In this case as well, in most of arbitrary cross sectional forms, $LL1/LL2$ is 2.0 or less. Therefore, an excellent effect can be expected.

An effect of the invention described in claim 17 will be described.

When the dimension HH1 is less than or equal to the dimension LL1 in the cross sectional form of the block, an effect of equalizing the ground contact pressure distribution is enhanced.

The reason therefor is given by deformation of the block. It is necessary that the curved line of the tread surface in the cross section of the block is smooth to a certain extent.

The reason is that the block end is lifted up from the road surface in an excessively sharply curved line, so that the ground

contacting area of the block decreases and ununiformity of the ground contact pressure is caused at the block end.

Accordingly, when $HH1/LL1$ is 1.0 or less, a uniform state of the ground contact pressure is obtained.

An effect of the invention described in claim 18 will be described.

When the dimension $HH2$ is less than or equal to the dimension $LL2$ in the cross section of the block, an effect of equalizing the ground contact pressure distribution is enhanced.

The reason therefor is given by deformation of the block. It is necessary that the curved line of the tread surface in the cross section of the block is smooth to a certain extent.

The reason is that the block end is lifted up from the road surface in an excessively sharply curved line, so that the ground contacting area decreases and ununiformity of the ground contact pressure is caused at the block end.

Accordingly, when $HH2/LL2$ is 1.0 or less, a uniform state of the ground contact pressure is obtained.

An effect of the invention described in claim 19 will be described.

When $T1/H0$ is less than 0.75, a region of the block having the minimum height $T1$, that is, a low region of the block does not contact the road surface and there is a possibility that the ground contacting area of the block may decrease. On the other hand, when $T1/H0$ is 1, an effect of reducing the ground contact pressure is not obtained.

Accordingly, in order to maintain the ground contacting area of the block and to reliably obtain the effect of reducing the ground contact pressure, $T1/H0$ is preferably set such that $0.75 \leq T1/H0 < 1.0$.

An effect of the invention described in claim 20 will be described.

The peripheral protuberant portion is formed along the entire periphery of the end edge of the block, and therefore, ununiformity of the ground contact pressure can be suppressed over the entire periphery of the end edge of the block and the vicinity thereof irrespective of the shape of the block.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross sectional view showing an end of a block and the vicinity thereof according to a first embodiment of the present invention.

Fig. 2 is a plan view of a tread according to the first embodiment of the present invention.

Fig. 3 is a cross sectional view showing an end of a block and the vicinity thereof according to another example of the present invention.

Fig. 4 is a cross sectional view showing an end of a block and the vicinity thereof according to still another example of the present invention.

Fig. 5 is a cross sectional view showing an end of a block and the vicinity thereof according to still yet another example of the

present invention.

Fig. 6 is a cross sectional view of a block taken along a circumferential direction of a tire and a graph showing ground contact pressure at various positions on a tread surface of the block.

Fig. 7 is a cross sectional view of a block taken along a transverse direction of the tire and a graph showing ground contact pressure at various positions on the tread surface of the block.

Fig. 8 is a cross sectional view showing a dimensional relationship of a peripheral protuberant portion.

Fig. 9 is a diagram for illustrating directions in which input acts at the time of a test.

Fig. 10 is a cross sectional view of a conventional block, which shows a worn state of the block.

Fig. 11 is a cross sectional view of a block of a fourth embodiment of the present invention, which shows a worn state of the block.

Fig. 12 is a table showing evaluation results obtained from an actual vehicle when the value of HH1 is changed.

Fig. 13 is a table showing evaluation results obtained from an actual vehicle when the value of HH2 is changed.

Fig. 14 is a table showing evaluation results obtained from an actual vehicle when the ratio HH2/HH1 is changed.

Fig. 15 is a table showing evaluation results obtained from an actual vehicle when the ratio LL1/LL2 is changed.

Fig. 16 is a table showing evaluation results obtained from an

actual vehicle when the ratio $HH1/LL1$ is changed.

Fig. 17 is a table showing evaluation results obtained from an actual vehicle when the ratio $HH2/LL2$ is changed.

Fig. 18A is a plan view of a block of a pneumatic tire according to another embodiment of the present invention.

Fig. 18B is a cross sectional view taken along the line 18(B)-18(B) in Fig. 18A.

Fig. 19 is a cross sectional view of a block in a conventional tire.

Fig. 20A is a diagram showing ground contact pressure distribution in a conventional pneumatic tire.

Fig. 20B is a diagram showing a deformed block in the conventional pneumatic tire.

Fig. 21 is a diagram showing a deformation state of a block in the conventional pneumatic tire.

Fig. 22 is a cross sectional view showing an end of a block and the vicinity thereof in a conventional example.

Fig. 23 is a cross sectional view showing an end of a block and the vicinity thereof in another conventional example.

Fig. 24 is a cross sectional view showing an end of a block and the vicinity thereof in still another conventional example.

Fig. 25 is a plan view of a tread in a test example.

BEST MODES FOR CARRYING OUT THE INVENTION

[First Embodiment]

A description will be given in detail of a pneumatic tire according to a first embodiment of the present invention. Referring now to Figs. 1 to 4, the present embodiment will be described.

As illustrated in Fig. 2, a pneumatic tire 10 includes a cylinder-shaped tread 12 extending between a pair of side walls (not shown) disposed parallel to each other.

The tread 12 comprises a plurality of main grooves 14 formed along a circumferential direction of the tire (that is, the direction indicated by arrow P), and a plurality of lug grooves 16 formed along a transverse direction of the tire (that is, the direction indicated by arrow W). A plurality of blocks 18 are demarcated by the main grooves 14 and the lug grooves 16.

These blocks 18 are each formed substantially into a rectangular parallelepiped in which a tread surface 20 is a square whose lengths in transverse and circumferential directions of the tire are equal to each other.

An end on the tread surface 20 of the block 18 is chamfered (a portion subjected to chamfering is hereinafter referred to as a chamfer portion 24).

A cross sectional form (of only the end of the block 18 and the vicinity thereof) of the block 18 in a direction oriented from a groove wall surface 22 tangent to the chamfer portion 24 of the block 18 toward a side wall opposite to the groove wall surface 22 so as to be substantially perpendicular to the groove wall surface 22, is shown in Fig. 1.

As described above, the cross sectional form of the chamfer portion 24 is formed in such a manner that a curvature of the chamfer portion 24 gradually increases from a central side of the block 18 to the groove wall surface 22 in the vicinity of the end of the block 18 (that is, an angle of inclination θ is made larger). Particularly, the curvature of the chamfer portion 24 is remarkably increased in the vicinity of the groove wall surface 22.

A portion at the center of the tread surface 20 in the block 18, which is not chamfered, is hereinafter referred to as a central portion 21.

Operations of the pneumatic tire 10 having the above-described structure will be described hereinafter.

That is, the chamfer portion 24 is formed such that the curvature thereof gradually increases toward the vicinity of the groove wall surface (see Fig. 20A) in which the ground contact pressure remarkably increases. Therefore, an amount by which the ground contact pressure is suppressed increases toward the vicinity of the groove wall surface 22 at which the ground contact pressure becomes maximum, and the ground contact pressure on the tread surface 20 is equalized.

It is, however, ideal but complicated that a subtle change of the curvature as represented by various functions be realized by a finished product.

Accordingly, there is considered a simplified structure in which a block-center side 24A and a block-end side 24B (near the

groove wall surface 22) in the chamfer portion 24 are chamfered in different ways.

There can be provided the following methods in this case:

- (1) the chamfer (contour) form (cross sectional form) of the block is provided by continuously forming two types of tapers in which an angle of inclination θ of the block-end side 24B is larger than that of the block-center side 24A (see Fig. 3);
- (2) the chamfer form of the block is provided by continuously forming the block-center side 24A formed as a taper, and the block-end side 24B formed as an R-shaped curved line, that is, a curved line having a fixed curvature (see Fig. 4); and
- (3) the chamfer form of the block is provided by continuously forming the block-center side 24A formed as a curved line having a radius of curvature R_1 , and the block-end side 24B formed as a curved line having a radius of curvature R_2 ($R_1 > R_2$) (see Fig. 5).

Among the above-described methods, it is desired that the methods (2) and (3) be used from the standpoint of equalization of ground contact pressure in the end of the block and the vicinity thereof.

In order to ascertain the above-described operational effects, a handling stability test was conducted.

Tires used for the test were radial tires whose size was 205/55R16. As illustrated in Fig. 2, a tread pattern of each tire is a combination of squares. The block size was 30 mm×30 mm and the height of the block was 10 mm.

First, in order to ascertain effects of the chamfer form, pneumatic tires of the following examples were used:

Example 1: a chamfer form formed by a taper portion and an R-shaped curve (see Fig. 4)

Example 2: a chamfer form formed by curved lines having radii of curvature $R1$ and $R2$ ($R1 > R2$) (see Fig. 5)

Conventional example 1: no chamfer formed

Conventional example 2: a taper portion formed (see Fig. 22)

Conventional example 3: a chamfer form formed by an R-shaped curve only tangent to a ground contact surface of the block (see Fig. 24)

It is desirable that in Examples 1 and 2, the two curved lines be continuously connected to each other with a common tangent line at an intersection point. However, for the purpose of equalizing overall dimensions of the chamfer as far as possible, an approximate value which is close to a tangent continuous state is selected in this case.

Detailed dimensions are shown in Table 1.

A feeling evaluation was conducted with a vehicle to which the above-described tires were mounted and which was run by an experienced driver on a test course road. The evaluation was made as an index with the result of the tire of the conventional example 1 being 100. The higher the index, the better the feeling evaluation.

L0 indicates a transverse dimension of the block along the cross sectional direction, L1 indicates a transverse dimension of the block along the cross sectional direction from the groove wall surface 22 to a boundary between the chamfer portion 24 and the central

portion 21.

H0 indicates the maximum height of the block and H1 indicates a height at an intersection point of the chamfer portion 24 and the groove wall surface 22.

The "height" mentioned herein means a dimension measured from the bottom of the main groove 14.

TABLE 1

	Chamfer form Block-center side	Chamfer form in a peripheral portion of block	L1/L0	H1/H0	H1	Score Of Evalu- ation
Example 1	Straight line (0.5 mm chamfered in 4mm)	R4.0	0.2	0.85	1.5	115
Example 2	R16.25	R4.0	0.2	0.85	1.5	122
Conventional Example 1	-----	-----	-----	-----	-----	100
Conventional Example 2	Straight line (1.5mm chamfered in 6mm)	←	0.2	0.85	1.5	108
Conventional Example 3	R12.75	←	0.2	0.85	1.5	109

Next, in order to ascertain the difference in the effect based on the length L1 in the cross sectional direction to be chamfered in the case of "R1+R2" in which the most excellent effect was obtained (Example 2), Examples 1-1 to 1-5 and Conventional example 1-1 (no chamfer formed) were compared. The same testing method and evaluation method are used. The test results are shown in Table 2.

TABLE 2

	L1/L0	Score of evaluation
Example 1-1	0.01	106
Example 1-2	0.02	112
Example 1-3	0.15	122
Example 1-4	0.29	114
Example 1-5	0.31	107
Conventional Example 1-1	-----	100

Fixed condition:

H1/H0	H1
0.85	1.5

Further, in order to ascertain a desired height of chamfer in the case of "R1+R2", Examples 2-1 to 2-5 and Conventional Example 2-1 (no chamfer formed) were compared. The same testing method and evaluation method are used. The test results are shown in Table 3.

TABLE 3

	H0-H1	H1/H0	Score of evaluation
Example 1-1	0.05	0.995	102
Example 1-2	0.10	0.990	112
Example 1-3	1.25	0.875	122
Example 1-4	2.5	0.750	112
Example 1-5	2.6	0.740	109
Example 1-6	3.0	0.700	103
Example 1-7	3.2	0.680	97
Conventional Example 1	-----	-----	100

Fixed conditions:

L1/L0: 0.2 (two types of R: radius of curvature)

It can be seen from Table 1 that the chamfer form proposed by the present invention, which approximates to an actual ground contact pressure distribution, be effective. Although the conventional chamfered structure improves the performance as compared with no chamfer structure, the above-described evaluation was conducted assuming the desired standard in this case being 110 or greater, which greatly differs from the conventional examples.

A preferred chamfer dimension is determined based on the above-described standard. The block size varies for each block pattern. It is preferable from Table 2 that a chamfer length L1 be 0.02 to 0.3 with the cross sectional length L0 of the block (along the transverse direction of the tire) being 1.

Further, it is desired from Table 3 that the height of chamfer (H0-H1) be 0.1 to 2.5 mm. Furthermore, a desired effect can be

recognized when the height position of the intersection point of the chamfer portion 24 and the groove wall surface 22 is approximately 0.7 or greater with respect to the height of the block being 1.

Moreover, even if an amount of chamfer is small (even if the height position of the intersection point is 0.995), the effect of an improvement in the handling stability is obtained.

The height position of the intersection point is more preferably 0.750 to 0.990.

[Second Embodiment]

Next, a second embodiment of pneumatic tire according to the present invention will be described. It should be noted that the same members as those of the first embodiment will be denoted by the same reference numerals, and a description thereof will be omitted.

Fig. 6 shows a cross section of the block 18 taken along the circumferential direction of a tire and Fig. 7 shows a cross section of the block 18 taken along the transverse direction of the tire.

As illustrated in Figs. 6 and 7, a peripheral protuberant portion 26 is formed on a tread surface of the block 18 in the vicinities of end edges of the block 18 both in circumferential and transverse directions of the tire. In the present embodiment, the peripheral protuberant portion 26 is continuously formed along the outer periphery of the block 18.

A contour line of the peripheral protuberant portion 26 is preferably formed by a smooth curved line as shown in the above-described cross sectional views.

In the peripheral protuberant portion 26, a top 26A is positioned further at the inner side of the block than an extension line of a side surface (groove wall) 18A of the block 18 and the height of the block 18 gradually decreases from the top 26A toward the end edge of the block 18 and also toward the central portion of the block 18.

Next, a description will be given of preferable ranges of the dimensions of the peripheral protuberant portion of the block 18, and the like.

(1) As shown in Fig. 8, when a distance measured from an intersection point C of the side surface 18A of the block 18 and the peripheral protuberant portion 26 to a height position of the top 26A of the peripheral protuberant portion 26 along the radial direction of a tire (that is, the direction indicated by arrow D) is indicated by HH1, the dimension HH1 is preferably in the range from 0.1 to 2.5 mm.

(2) When a distance measured from a maximum depth portion 18B at the central region of the block 18 to the height position of the top 26A of the peripheral protuberant portion 26 along the radial direction of the tire is indicated by HH2, the dimension HH2 is preferably in the range from 0.1 to 2.5 mm.

(3) It is preferable that $HH2/HH1$ is 1.5 or less.

(4) When a distance measured from the intersection point C to the top 26A in the direction along the tread surface of the block 18 is indicated by LL1, the dimension LL1 is preferably 10.0 mm or less.

(5) When a distance measured from the top 26A to the maximum depth portion 18B in the direction along the tread surface of the block

18 is indicated by LL2, LL1/LL2 is preferably 2.0 or less.

(6) It is preferable that HH1/LL1 is 1.0 or less.

(7) It is preferable that HH2/LL2 is 1.0 or less.

(8) The ratio between the maximum height H0 of the block 18 and the minimum height T1 of the block 18, that is, $T1/H0$ is preferably in the range of $0.75 \leq T1/H0 < 1.0$ (see Fig. 8; the position of the minimum height T1 may be provided at the end edge of the block or at the central portion of the block).

Operation:

Next, operation of the pneumatic tire 10 according to the second embodiment will be described.

When a block having a fixed height contacts the road surface, the ground contact pressure becomes especially large at a ground-contact end of the block and also becomes large at the central portion of the block, and becomes relatively small in a region between the ground-contact end and the central portion of the block. However, in a case in which as illustrated in Figs. 6 and 7, as the peripheral protuberant portion 26 is formed on the tread surface of the block 18 in the vicinity of the end edge of the block in such a manner that the height of the block gradually decreases toward the end edge of the block and also toward the central portion of the block, the ground contact pressure at the end edge of the block and at the central portion of the block can be reduced when the block contacts the road surface (the states indicated by the phantom lines in Figs. 6 and 7). As can be seen from the graphs of ground contact pressure in Figs. 6 and 7, the

ground contact pressure can be equalized both in the circumferential and axial directions of the tire.

In the present embodiment, ununiformity of the ground contact pressure in the circumferential direction of the tire can be prevented due to the peripheral protuberant portion 26 being formed at both sides of the block 18 in the circumferential direction of the tire. Therefore, occurrence of a buckling phenomenon caused by braking/driving force can be prevented and handling stability can be improved. Further, uneven wear in the vicinities of circumferential direction ends of the tire, caused by uniformity of the ground contact pressure in the circumferential direction of the tire, can be suppressed.

Moreover, since the peripheral protuberant portion 26 is also provided at both lateral ends of the tire, generation of uneven wear in the vicinities of lateral ends of the tire, caused by ununiformity of the ground contact pressure in the transverse direction of the tire, can be suppressed.

When the dimension HH1 is set in the range from 0.1 to 2.5 mm, ununiformity of the ground contact pressure can be prevented without reducing a ground-contacting area at the end edge of the block.

When the dimension HH2 is set in the range from 0.1 to 2.5 mm, the ground contact pressure at the central portion of the block can reliably be reduced without reducing a ground-contacting area at the central portion of the block.

When the ratio HH2/HH1 is set to be 1.5 or less, the ground contact pressure in the vicinity of the maximum depth portion of the block (at the central portion of the block) and the ground contact pressure of the top 26A of the peripheral protuberant portion 26 approximate to each other when the block 18 contacts the road surface. Therefore, the above-described numerical range is preferable.

It is preferable that the dimension LL1 is 10.0 mm or less so as to allow further equalization of the ground contact pressure.

It is preferable that LL1/LL2 is 2.0 or less so as to equalize the distribution of ground contact pressure of the rectangular block 18.

It is preferable that HH1/LL1 is 1.0 or less so as to realize a uniform state of the ground contact pressure.

It is preferable that HH2/LL2 is 1.0 or less so as to enhance the effect of equalization of the ground contact pressure distribution.

Further, if the ratio between the maximum height H0 of the block 18 and the minimum height T1 of the block 18 ($T1/H0$) is set such that $0.75 \leq T1/H0 < 1.0$, the ground contact area is maintained and the effect of reducing the ground contact pressure can reliably be obtained. Therefore, the above-described range is preferable.

The test results on which the above-described numerical determination is based are shown below.

These test results are evaluation results of handling stability obtained by using an actual vehicle, and are each expressed as an index with the tire having the conventional block with no chamfer

being 100. The higher the index, the better the performance. Further, the above-described evaluation was conducted assuming the desired standard being 110 or greater, which greatly differs from the conventional example.

Fig. 12 shows the evaluation results when the dimension HH1 measured from the intersection point C of the side surface 18A of the block 18 and the peripheral protuberant portion 26 to the height position of the top 26A of the peripheral protuberant portion 26 along the radial direction of the tire is changed at different values.

It can be seen from the above-described results that the proper value of the dimension HH1 is 0.1 to 2.5 mm, more preferably 0.5 to 1.2 mm. Further, when compared with the block in which only chamfer is provided, it can be seen that change in chamfering on the periphery of the block produces still more excellent effect.

Fig. 13 shows the evaluation results when the dimension H2 measured from the maximum depth portion 18B at the central region of the block 18 to the height position of the top 26A of the peripheral protuberant portion 26 along the radial direction of the tire is changed at different values.

It can be seen that the proper value in this case be desirably set at similar values to those of a corner portion in the cross section of the block.

Fig. 14 shows the evaluation results when the ratio HH2/HH1 is changed at different values.

It can be seen from the above-described results that an

excellent effect can be obtained when the ratio $HH2/HH1$ is approximately 1.5 or less. From the standpoint of obtaining the excellent effect, the $HH2/HH1$ is more desirably in the range of 0.15 to 1.0.

Fig. 15 shows the evaluation results when the dimension LL1 measured from the intersection point C to the height position of the top 26A in the direction along the tread surface of the block 18 is changed at different values.

At this time, the dimension LL2 which is a distance from the top 26A to the maximum depth portion 18B in the direction along the tread surface of the block 18 is given by subtracting the dimension LL1 from a half of the block length of the cross section in the transverse direction thereof (with the maximum depth portion 18B positioned at the central region of the block). It can be seen from the result that an excellent effect is exhibited when the dimension LL1 is 10 mm or less. Further, it can also be seen that the ratio $LL1/LL2$ in this case be 2.0 or less. In order to obtain the most excellent effect, the dimension LL1 is set in the range from 1 to 6 mm. It can be seen that in this case the ratio $LL1/LL2$ is approximately in the range from 0.1 to 0.7. That is, the above-described numerical ranges indicates that the dimension LL1 at the side near the end of the block in the cross section is preferably shorter.

Fig. 16 shows the evaluation results when the ratio $HH1/LL1$ is changed at different values.

It can be seen from the above-described results that a desired

effect is exhibited when the ratio $HH1/LL1$ is 1.0 or less and an excellent effect is exhibited when the ratio $HH1/LL1$ is in the range from 0.1 to 0.7. The most excellent effect is exhibited when the ratio is in the range from 0.1 to 0.5.

Fig. 17 shows the evaluation results when the relationship between $HH2$ and $LL2$ is changed in various manners.

It can be seen from the above-described results that a desired effect is exhibited when the ratio $HH2/LL2$ is 1.0 or less, more preferably in the range from 0.06 to 1.0. The most excellent effect can be obtained when the ratio is approximately in the range from 0.1 to 0.4.

In either case, the evaluation result obtained by using an actual vehicle indicates that further improvement in the performance can be expected by changing chamfering on the circumference of the block. The reason is, as is considered, that a proper distribution of chamfering exists with respect to the ground-contacting characteristics influenced by the shape of the block itself.

[Other embodiments]

In the above-described embodiment, the circumferential groove 14 extends along the circumferential direction of the tire (i.e., the direction indicated by arrow A) and the lateral groove 16 extends along the transverse direction of the tire (i.e., the direction indicated by arrow B). However, the present invention is not limited to the same. The circumferential groove 14 may be inclined with respect to the circumferential direction of the tire and the lateral groove 16 may be

inclined with respect to the transverse direction of the tire.

Further, the block 18 of the above-described embodiment is rectangular, but the present invention is not limited to the same. The shape of the block 18 when the tread 12 is seen from above may be a polygon such as a diamond shape, a hexagon, or an octagon depending on orientation of the circumferential groove 14 and the lateral groove 16, or provision of chamfering, notching, or the like. Alternatively, as shown in Fig. 18A, the block 18 may have a substantially U-shaped configuration or may also have a circular or ellipsoidal configuration.

In the block 18 shown in Fig. 18A, the peripheral protuberant portion 26 (in this drawing, a region indicated by hatched lines) is formed along the end edge of the block. As shown in the cross sectional view of Fig. 18B, the peripheral protuberant portion 26 is provided at three locations in the cross section, that is, at both end edges of the block and at the central portion thereof, depending on a position at which the block 18 is cut.

Test Examples:

In order to ascertain the effects of the present invention, eight types of tires according to examples to which the present invention is applied, and one type of conventional tire were prepared. The handling stability and ride comfort characteristic were evaluated by tests conducted with an actual vehicle.

The tire size of each tire was 195/50R15 (having a tread pattern shown in Fig. 25) and a test using an actual vehicle was conducted with the tires filled with an internal pressure of 2.0 kg/cm².

Further, the block size was 30 mm (in the circumferential direction of the tire) \times 20 mm (in the transverse direction of the tire) \times 9 mm (in the height of the tire).

The evaluation are shown in Table 4 below. This is a feeling evaluation by a test driver, and is expressed as an index with the conventional tire being 100. Further, the larger the value, the better the performance. Further, in the automobile market, so long as the index is 110 or high, an improvement in the performance is clearly recognized.

TABLE 4

Results obtained by using an actual vehicle

	LL1(mm) Maximum value	HH1(mm) Maximum value	LL2(mm) Maximum value	HH2(mm) maximum value	T1/H0	Performance	
						Handling stability	Riding comfort
Conven- tional Example	-----	-----	-----	-----	1.0	100	100
Example 1	1.0	0.3	17.0	0.2	0.97	112	100
Example 2	1.5	0.3	16.5	0.4	0.96	114	100
Example 3	3.0	0.4	15.0	0.3	0.96	115	100
Example 4	4.0	0.8	14.0	0.6	0.91	121	98
Example 5	5.0	0.9	13.0	0.6	0.90	118	99
Example 6	6.0	1.0	12.0	1.0	0.88	116	99
Example 7	8.0	1.5	10.0	1.0	0.83	112	98
Example 8	10.0	2.5	8.0	2.0	0.72	108	98

It can be seen that in the tires of Examples 1 to 8 to which the present invention is applied, the handling stability is improved as compared with the conventional tire.

Further, in the tire of Example 4 which was evaluated most highly, the ground contact pressure was evaluated below in the following tables 5 and 6.

TABLE 5

Comparison of standard deviation of ground contact pressure between the conventional tire and the tire of Example 4

	Conventional tire	Tire of Example 4
Input 1	100	66
Input 2	100	55
Input 3	100	54
Input 4	100	51
Input 5	100	54
Input 6	100	55
Input 7	100	54
Input 8	100	51
Input 9	100	54
Average of total input	100	55

TABLE 6

Comparison of ground-contacting area between the conventional tire and the tire of Example 4

	Conventional tire	Tire of Example 4
Input 1	100	101
Input 2	100	101
Input 3	100	100
Input 4	100	100
Input 5	100	100
Input 6	100	101
Input 7	100	100
Input 8	100	100
Input 9	100	100
Average of total input	100	100

The input conditions and input numbers taken into consideration at this time are shown in Fig. 9.

The input 1 is applied under a vertical load condition (corresponding to bearing stress of 4 kgf/cm^2). The input 2 to 8 are shearing force input in directions shown in Fig. 9 (evaluation with an amount of shear deformation of 1 mm).

In Table 5, the degree of equalization of ground contact pressure on a tread surface of a block is expressed as an index for each input. The result of the above-described comparison indicates that ununiformity of the ground contact pressure is improved by 45%, on the average, in the standard deviation of ground contact pressure in a ground-contacting area.

Further, in Table 6 in which an area of the ground-contacting area of the block is shown for each input, it is suggested that the above-described improvement has been made without reducing the ground-contacting area and other performances are not apt to be adversely affected.

The worn state of the block of Example 4 is shown in Fig. 11 and the worn state of the block in the conventional tire is shown in Fig. 10. In each of the drawings, the solid line indicates a cross section in the vicinity of the ground-contacting end of the block before wear, and the phantom line indicates a cross section in the vicinity of the ground-contacting end of the block after wear.

In the block of the conventional tire, the ground-contacting end is locally and severely worn as shown in Fig. 10.

In the block of Example 4, a uniform worn state is realized as shown in Fig. 11.

09/673738

526 Rec'd PCT/PTO 20 OCT 2000

WHAT IS CLAIMED IS:

1. (amended) A pneumatic tire in which a plurality of blocks demarcated by circumferential grooves extending in a circumferential direction of the tire and grooves intersecting the circumferential grooves, are provided on a tread,

wherein at least a portion of a block edge is chamfered from the side of a block center to a groove wall surface of each of the blocks;

a heightwise cross sectional form of a chamfer portion perpendicular to the groove wall surface is formed by a combination of a plurality of chamfer forms;

an angle formed by a tangential line of the chamfer portion with respect to a horizontal extension line of the surface of the block center in a heightwise cross section perpendicular to the groove wall surface increases from the side of the block center to the side of the block end; and

a heightwise cross sectional form of the chamfer portion is provided such that the side of the central portion of the block thereof is formed as a straight line portion and the side of the block end thereof is formed by at least one curved line portion having a fixed curvature.

2. (deleted)

3. (amended) A pneumatic tire according to claim 1, wherein the cross sectional form of the chamfer portion is comprised of two curved line

portions having different curvatures.

4. A pneumatic tire according to any one of claims 1 to 3, wherein when in the heightwise cross section perpendicular to the groove wall surface, a length of the chamfer portion measured along a horizontal extension line of the surface of the block central portion is represented by L1 and a likewise measured length of the block is represented by L0, the ratio L1/L0 is in the range from 0.02 to 0.3.

5. A pneumatic tire according to any one of claims 1 to 4, wherein a distance, measured along a radial direction of the tire, between the horizontal extension line of the surface of the block central portion and an intersection point of the chamfer portion and the groove wall surface is in the range from 0.10 to 2.50 mm.

6. A pneumatic tire according to any one of claims 1 to 5, wherein when a heightwise distance between a groove bottom of the block and the intersection point of the chamfer portion and the groove wall surface is represented by H1 and the maximum height of the block is represented by H0, the ratio H1/H0 is greater than or equal to 0.75 and less than 1.0.

7. A pneumatic tire according to any one of claims 1 to 6, wherein the cross sectional form of the chamfer portion changes at a peripheral edge of the block for each portion of the block.

8. (amended) A pneumatic tire in which a plurality of blocks demarcated by circumferential grooves extending in a circumferential direction of the tire and grooves intersecting the circumferential grooves, are provided on a tread,

wherein a peripheral protuberant portion is formed on a tread surface of the block in the vicinity of the end edge thereof in such a manner that the height of the block gradually decreases toward the block end edge and also toward the central portion of the block.

9. A pneumatic tire according to claim 8, wherein the peripheral protuberant portion is formed in at least both end edges of the block in the cross section of the block taken along the heightwise direction.

10. A pneumatic tire according to claim 8 or claim 9, wherein the peripheral protuberant portion is disposed in vicinities of the end edges at both sides of the block in the circumferential direction of the tire.

11. A pneumatic tire according to any one of claims 8 to 10, wherein the peripheral protuberant portion is disposed in vicinities of the end edges at both side of the block in the transverse direction of the tire.

12. A pneumatic tire according to any one of claims 8 to 11,

wherein a dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion is in the range from 0.1 to 2.5 mm.

13. A pneumatic tire according to any one of claims 8 to 12, wherein a dimension HH2 measured along the radial direction of the tire, between a maximum depth portion in a central region of the block and the height position of the top of the peripheral protuberant portion is in the range from 0.1 to 2.50 mm.

14. A pneumatic tire according to any one of claims 8 to 13, wherein the ratio between the dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion, and the dimension HH2 measured along the radial direction of the tire, between a maximum depth portion in a central region of the block and the height position of the top of the peripheral protuberant portion, that is, $HH2/HH1$, is 1.5 or less.

15. A pneumatic tire according to any one of claims 8 to 14, wherein a dimension LL1 measured in a direction of the tread surface, between the intersection point of the groove wall surface of the block and the peripheral protuberant portion, and the top of the peripheral

protuberant portion is 10.0 mm or less.

16. A pneumatic tire according to any one of claims 8 to 15, wherein the ratio between the dimension LL1 measured in a direction along the tread surface, between the intersection point of the groove wall surface of the block and the peripheral protuberant portion, and the top of the peripheral protuberant portion, and a dimension LL2 measured in the direction along the tread from the top of the peripheral protuberant portion to the maximum depth portion in the central region of the block, that is, $LL1/LL2$ is 2.0 or less.

17. A pneumatic tire according to any one of claims 8 to 16, wherein the ratio between the dimension HH1 measured along a radial direction of the tire, between an intersection point of a groove wall surface of the block and the peripheral protuberant portion, and a height position of a top of the peripheral protuberant portion, and the dimension LL1 measured in a direction along the tread surface, between the intersection point of the groove wall surface of the block and the peripheral protuberant portion, and the top of the peripheral protuberant portion, that is, $HH1/LL1$ is 1.0 or less.

18. A pneumatic tire according to any one of claims 8 to 17, wherein the ratio between the dimension HH2 measured along the radial direction of the tire, between a maximum depth portion in a central region of the block and the height position of the top of the

peripheral protuberant portion, and the dimension LL2 measured in the direction along the tread from the top of the peripheral protuberant portion to the maximum depth portion in the central region of the block, that is, $HH2/LL2$ is 1.0 or less.

19. A pneumatic tire according to any one of claims 8 to 18, wherein the ratio between the maximum height H0 and the minimum height T1 of the block, that is, $T1/H0$ is set in the range of $0.75 \leq T1/H0 < 1.0$.

20. A pneumatic tire according to any one of claims 8 to 19, wherein the peripheral protuberant portion is formed along an entire periphery of the end edge of the block.

21. (added) A pneumatic tire according to any one of claims 8 to 20, wherein at least a portion of a block edge is chamfered from the side of a block center to a groove wall surface of each of the blocks; and
an angle formed by a tangential line of the chamfer portion with respect to a horizontal extension line of the surface of the block center in a heightwise cross section perpendicular to the groove wall surface increases from the side of the block center to the side of the block end.

22. (added) A pneumatic tire according to claim 21, wherein said angle increases smoothly toward the side of the block end.

ABSTRACT

An end of a block 18 formed on a tread surface of a tire is chamfered in such a manner that a curvature of a chamfer increases toward the end of the block. Accordingly, a ground contact pressure which usually increases locally at the end of the block 18 is equalized and handling stability of the tire improves. Particularly, since the curvature changes, the ground contact pressure can be controlled corresponding to an actual distribution of ground contact pressure. As a result, the ground contact pressure can be equalized still further and an improvement in handling stability of the tire is achieved.

FIG. 1

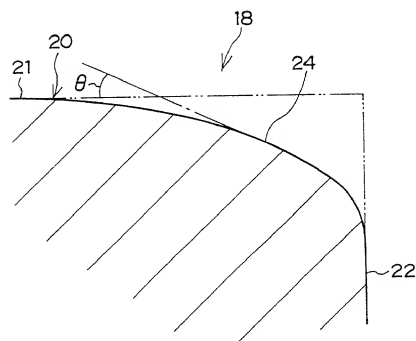


FIG. 2

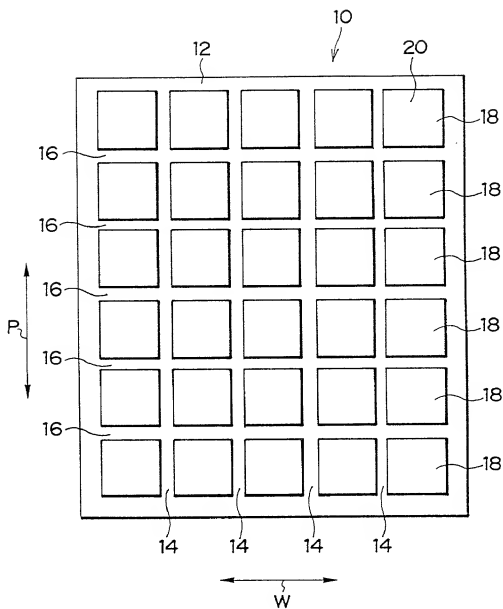


FIG. 3




FIG. 4

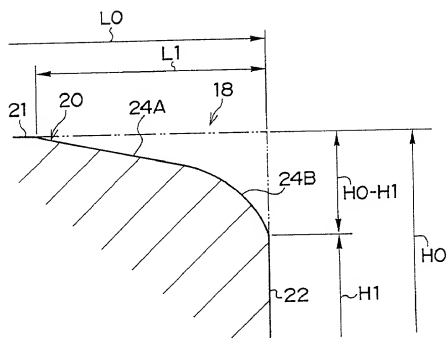


FIG. 5

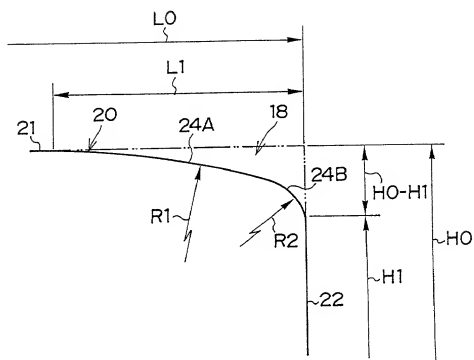


FIG. 6

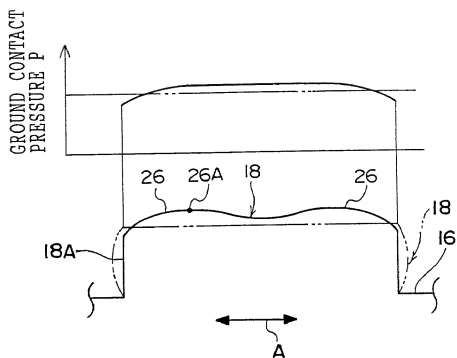


FIG. 7

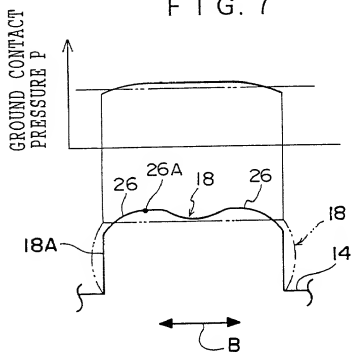


FIG. 8



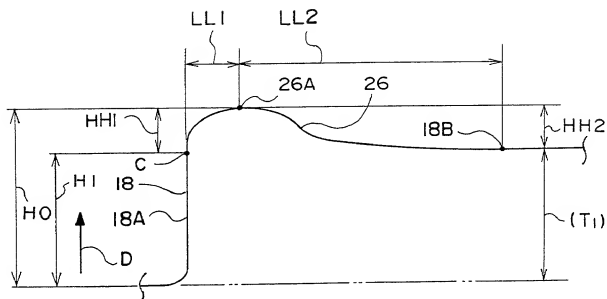


FIG. 9

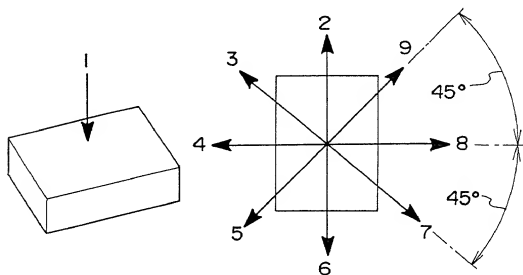

F I G. 1 0



F I G. 1 1




FIG. 12

No.	HH1	
13-1	0.0	108
13-2	0.1	114
13-3	0.5	124
13-4	0.7	127
13-5	1.2	123
13-6	2.5	122
13-7	3.0	107

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

LL1	LL2	HH2
2.5	12.5	0.15

(mm)

FIG. 13

No.	HH2	
14-1	0.0	109
14-2	0.1	113
14-3	0.5	125
14-4	0.7	130
14-5	1.2	127
14-6	2.5	119
14-7	3.0	106

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

HH1	LL1	LL2
0.7	2.5	12.5

(mm)

FIG. 14

No.	HH2	HH2/HH1	
15-1	0.0	0.00	109
15-2	0.1	0.14	119
15-3	0.5	0.71	125
15-4	0.7	1.00	130
15-5	1.00	1.43	113
15-6	2.00	2.86	98
15-7	3.0	4.29	97

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

HH1	LL1	LL2
0.7	2.5	12.5

(mm)

FIG. 15

LL1	LL2	LL1/LL2	
0.70	14.30	0.05	113
1.00	14.00	0.07	118
3.00	12.00	0.25	125
4.00	11.00	0.36	122
6.00	9.00	0.67	119
9.00	6.00	1.50	115
10.00	5.00	2.00	113
12.00	3.00	4.00	107

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

HH1	HH2
0.7	0.5

(mm)

FIG. 16

No.	LL1	HH1/LL1	
18-1	0.70	1.00	112
18-2	1.00	0.70	118
18-3	1.40	0.50	122
18-4	3.00	0.23	125
18-5	6.00	0.12	121
18-6	9.00	0.08	118
18-7	10.00	0.07	113

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

HH1	HH2	LL2
0.7	0.5	15-LL1

(mm)

FIG. 17

No.	LL2	HH2/LL2	
19-1	0.50	1.00	115
19-2	0.75	0.67	116
19-3	1.40	0.36	118
19-4	3.00	0.17	126
19-5	6.00	0.08	124
19-6	9.00	0.06	115
19-7	10.00	0.05	110

(mm)

EVALUATION CONDUCTED
WITH ACTUAL VEHICLE

OTHER CONDITIONS

HH1	LL1	HH2
0.7	15-LL2	0.5

(mm)

FIG. 18 A

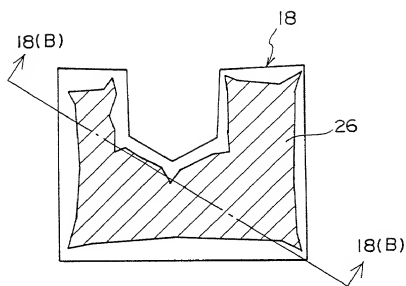


FIG. 18 B




FIG. 19




FIG. 20 A

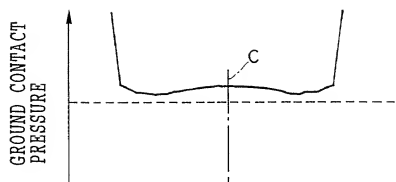


FIG. 20 B

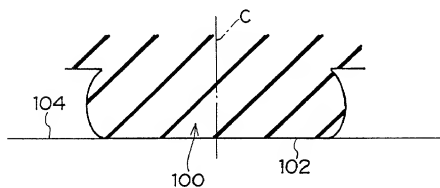


FIG. 21




FIG. 22

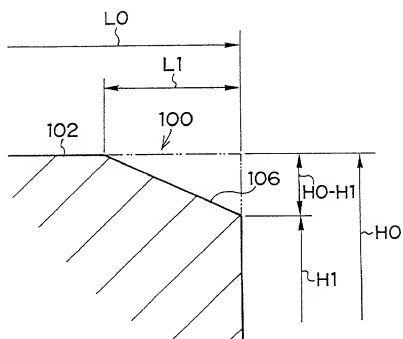


FIG. 23




FIG. 24


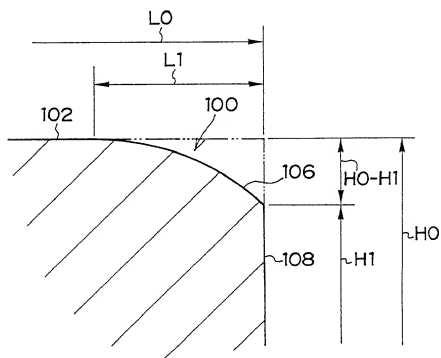


FIG. 25

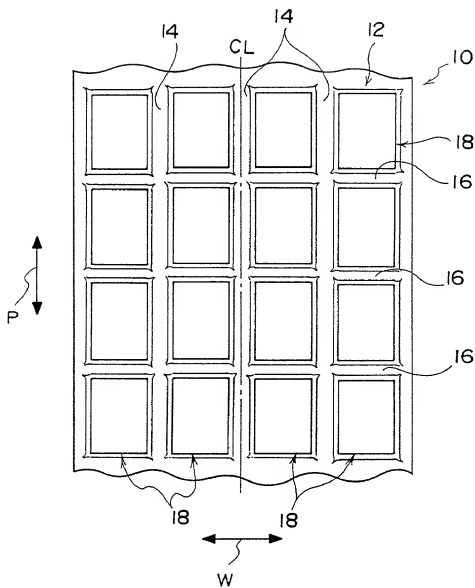

Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下々の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PNEUMATIC TIRE ✓

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

- ☐ 月 日に出願され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

- ☐ was filed on February 22, 2000 ✓
as United States Application Number or PCT
International Application Number
PCT/IP00/00994 ✓ and
was amended on
July 18, 2000 ✓ (if applicable)

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Japanese Language Declaration

日本語宣誓書

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明が特許の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明が特許の外国出願を以下に、枠内をマークすることで、示しています。

Priority foreign application(s)
外国での先行出願

11-43208
(Number)
(番号)

Japan
(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

(Number)
(番号)

(Country)
(国名)

私、第35編米国法典119条(e)項に基づいて下記の米
国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米
国特許出願に記載された権利、又は米国を指定している特許
協力条約365条(c)に基づき権利をここに主張します。また、
本出願の各請求範囲の内容が米国法典第35編112条
第1項又は特許協力条約で規定された方法で先行する米国特
許出願に開示されていない限り、その先行米国出願書提出日
以降で本出願書の日付内または特許協力条約国際提出日ま
での期間中に入手された、連邦規則法典第37編1条56項
で定義された特許資格の有無に関する重要な情報について開
示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書で私が行なう表
明が真実であり、かつ私の入手した情報と私の信じることに
基づく表明が全て真実であると信じていること、さらに故意
になされた虚偽の表明及びそれと同等の行為は米国法典第
18編第1001条に基づき、罰金または拘禁、もしくはそ
の両方により処罰されること、そしてそのような故意による
虚偽の表明を行えば、出願した、又は既に許可された特許
の有効性が失われることを認識し、よってここに上記のごと
く宣誓を致します。

I hereby claim foreign priority under Title 35, United States
Code, § 119(a)-(d) or § 365 (b) of any foreign application(s) for
patent or inventor's certificate, or § 365(a) of any PCT
International application which designated at least one country
other than the United States, listed below and have also
identified below, by checking the box, any foreign application
for patent or inventor's certificate, or PCT International
application having a filing date before that of the application on
which priority is claimed.

Priority Not Claimed
優先権主張なし

22/February/1999
(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

(Day/Month/Year Filed)
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, §
119(e) of any United States provisional application(s) listed
below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, §
120 of any United States application(s), or § 365(c) of any PCT
International application designating the United States, listed
below and, insofar as the subject matter of each of the claims of
this application is not disclosed in the prior United States or PCT
International application in the manner provided by the first
paragraph of Title 35, United States Code, § 112, I acknowledge
the duty to disclose information which is material to patentability
as defined in Title 37, Code of Federal Regulations, § 1.56
which became available between the filing date of the prior
application and the national or PCT International filing date of
this application.

(Status)(patented, pending, abandoned)
(現況：特許許可済、係属中、放棄済)

(Status)(patented, pending, abandoned)
(現況：特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own
knowledge are true and that all statements made on information
and belief are believed to be true, and further that these
statements were made with the knowledge that willful false
statements and the like so made are punishable by fine or
imprisonment, or both, under Section 1001 of Title 18 of the
United States Code and that such willful false statements may
jeopardize the validity of the application or any patent issued
thereon.

Japanese Language Declaration

日本語宣誓書

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)

John H. Mion, Reg. No. 18,879; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; J. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Brian W. Hannon, Reg. No. 32,778; Abraham J. Rosner, Reg. No. 33,276; Bruce E. Kramer, Reg. No. 33,725; Paul F. Neils, Reg. No. 33,102; Brett S. Sylvester, Reg. No. 32,765; Robert M. Masters, Reg. No. 35,603; George F. Lehnigk, Reg. No. 36,359; John T. Callahan, Reg. No. 32,607 and Steven M. Gruskin, Reg. No. 36,818.

書類送付先

Send Correspondence to:
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC
2100 Pennsylvania Avenue, N.W., Suite 800
Washington, D.C. 20137-3243

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to:

(202)293-7060

第一または第一発明者名

Full name of sole or first inventor

Fumio Takahashi

発明者の署名

日付

Inventor's signature

Date

Fumio Takahashi

October 12, 2000

住所

Residence

Tokyo, Japan JPN.

国籍

Citizenship

Japanese

私書箱

Post Office Address

3-5-5-617, Ogawahigashi-cho, Kodaira-shi,
Tokyo 187-0031, Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)